



EUV and Soft X-Ray Beamlines


David Attwood University of California, Berkeley


Cheiron School September 2011 SPring-8


CheironSchool_Sept2011_Lec2.ppt

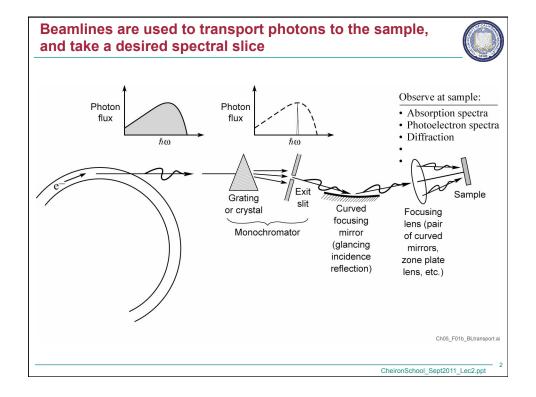


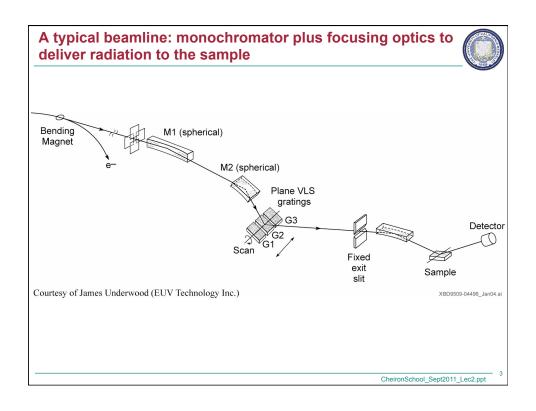

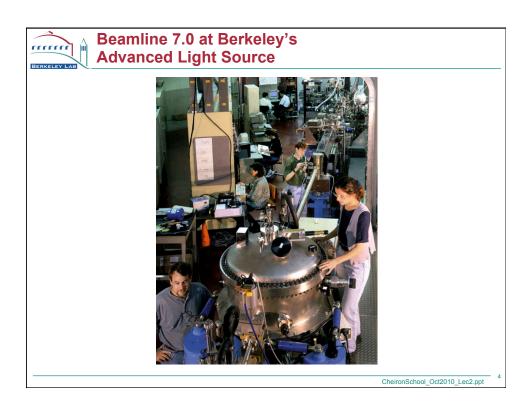


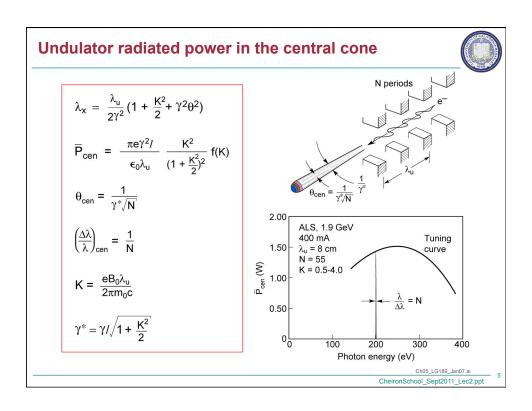


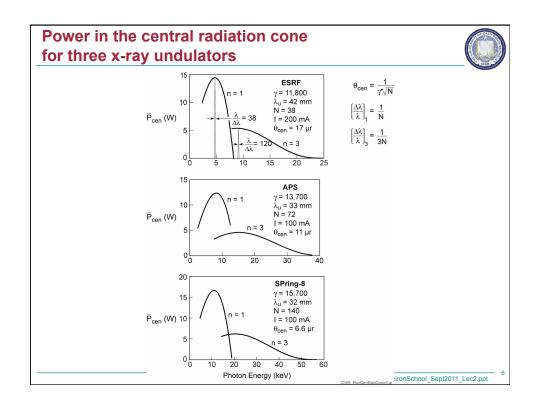


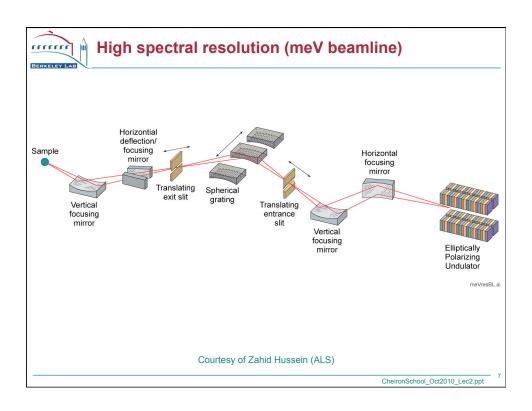





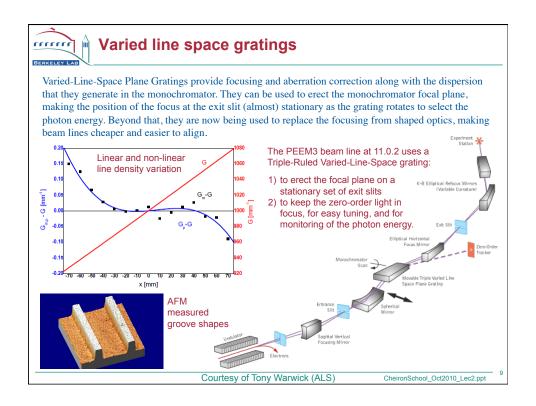

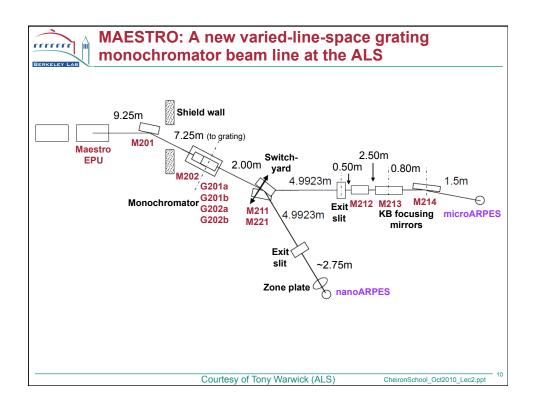

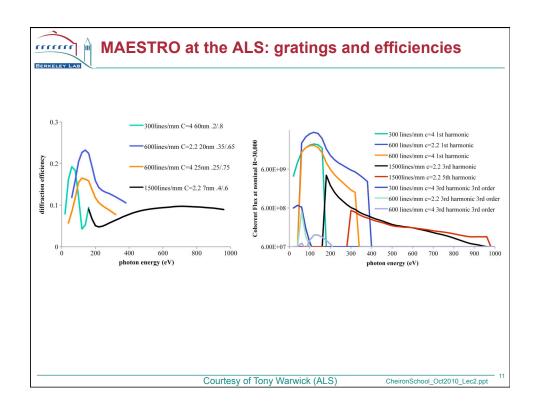

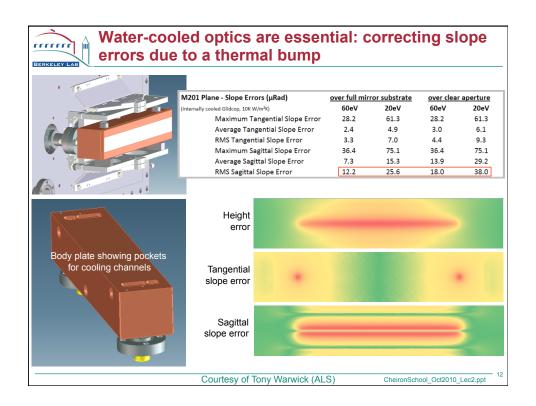

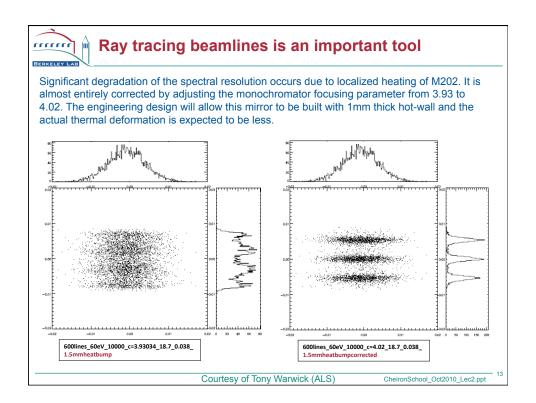



References

Reininger, R., Kriesel, K., Hulbert, S.L., Sanchez-Hanke, C. and Arena, D.A., Rev. Sci. Instrum., 79, 033108 2008

Peterson, H., Jung, C., Hellwig, C. Peatman, W.B. and Gudat, W., Rev. Sci. Instrum. 66 (1995) 1

Follath, R., and Senf, F., Nucl.Intrum. Methods Phys. Res. A390 (1997) 388

Amemiya, K., Kitajima, Y., Ohta, T., and Ito, K., J. Synchrotron Radiation 3 (1996) 282

The original SHADOW package is available at

www.nanotech.wisc.edu/CNTLABS/shadow.html and with an IDL user interface at www.esrf.fr/computing/scientific/xop

Undulator Radiation, Ellaume, P., in Undulators, Wigglers and their Applications,

Onuki, H. and Ellaume, P. eds., Taylor and Francis.


Characteristics of Synchrotron Radiation, Kim, K., J., in Xray Data Booklet LBNL internal report (1986) PUB 490 xdb.lbl.gov/xdb.pdf


D Fluckiger - Grating Solver Development Company Dec 2006 www.gsolver.com


Courtesy of Tony Warwick (ALS)


CheironSchool_Oct2010_Lec2.ppt


Facility	ALS	New Subaru	APS	SP-8
Electron energy	1.90 GeV	1.00 GeV	7.00 GeV	8.00 GeV
γ	3720	1957	13,700	15,700
Current (mA)	400	100	100	100
Circumference (m)	197	119	1100	1440
RF frequency (MHz)	500	500	352	509
Pulse duration (FWHM) (ps)	35-70	26	100	120
Bending Magnet Radiation:				
Bending magnet field (T)	1.27	1.03	0.599	0.679
Critical photon energy (keV)	3.05	0.685	19.5	28.9
Critical photon wavelength	0.407 nm	1.81 nm	0.636 Å	0.429 Å
Bending magnet sources	24	4	35	23
Undulator Radiation:				
Number of straight sections	12	4	40	48
Undulator period (typical) (cm)	5.00	5.40	3.30	3.20
Number of periods	89	200	72	140
Photon energy $(K = 1, n = 1)$	457 eV	117 eV	9.40 keV	12.7 keV
Photon wavelength $(K = 1, n = 1)$	2.71 nm	10.6 nm	1.32 Å	0.979 Å
Tuning range $(n = 1)$	230-620 eV	43-170 eV	3.5-12 keV	4.7-19 keV
Tuning range $(n = 3)$	690-1800 eV	130-500 eV	10-38 keV	16-51 keV
Central cone half-angle $(K = 1)$	35 μrad	44 µrad	11 μrad	6.6 µrad
Power in central cone $(K = 1, n = 1)$ (W)	2.3	0.15	12	16
Flux in central cone (photons/s)	3.1×10^{16}	7.9×10^{15}	7.9×10^{15}	7.9×10^{15}
σ_x , σ_y (μm)	260, 16	450, 220	320, 50	380, 6.8
σ'_{x}, σ'_{y} (µrad)	23, 3.9	89, 18	23, 7	16, 1.8
Brightness $(K = 1, n = 1)^a$				
$[(photons/s)/mm^2 \cdot mrad^2 \cdot (0.1\%BW)]$	2.3×10^{19}	1.7×10^{17}	5.9×10^{18}	1.8×10^{20}
Total power $(K = 1, \text{ all } n, \text{ all } \theta)$ (W)	83	27	350	2,000
Other undulator periods (cm)	3.65, 8.00, 10.0	7.60	2.70, 5.50, 12.8	2.4, 10.0, 3.7, 12.0
Wiggler Radiation:				
Wiggler period (typical) (cm)	16.0		8.5	12.0
Number of periods	19		28	37
Magnetic field (maximum) (T)	2.1		1.0	1.0
K (maximum)	32		7.9	11
Critical photon energy (keV)	5.1		33	43
Critical photon wavelength	0.24 nm		0.38 Å	0.29 Å
Total power (max. K) (kW)	13		7.4	18

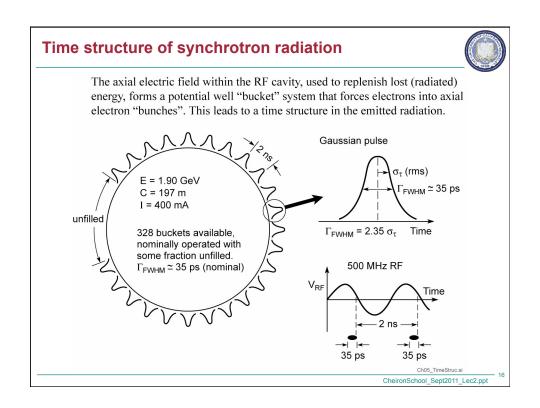

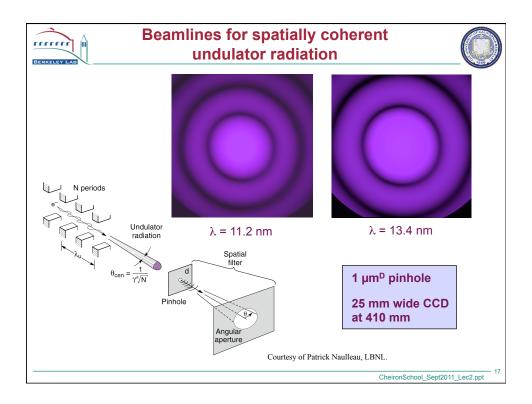

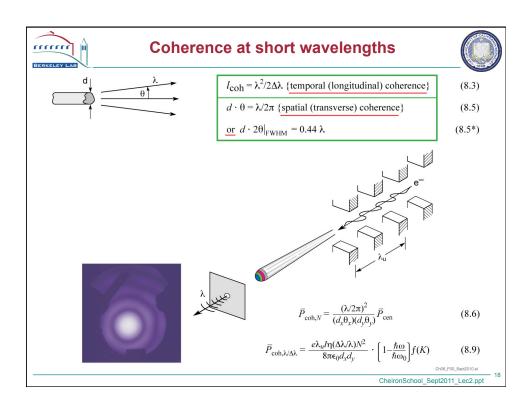

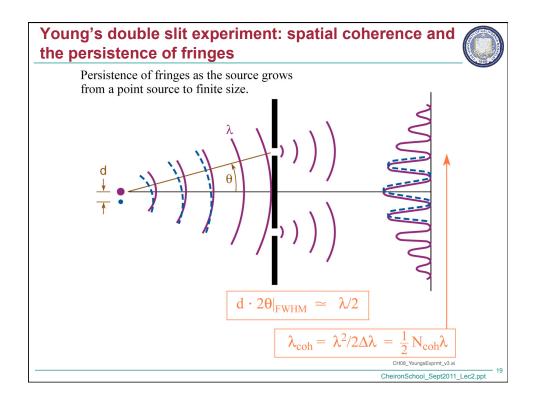

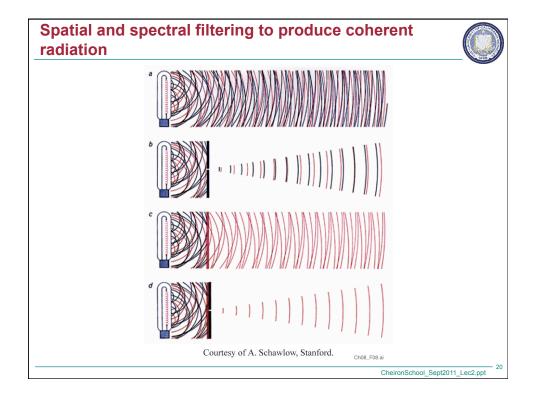

Spatial and temporal coherence




Mutual coherence factor

$$\Gamma_{12}(\tau) \equiv \langle E_1(t+\tau)E_2^*(t)\rangle \tag{8.1}$$

Normalize degree of spatial coherence (complex coherence factor)

$$\mu_{12} = \frac{\langle E_1(t)E_2^*(t)\rangle}{\sqrt{\langle |E_1|^2\rangle}\sqrt{\langle |E_2|^2\rangle}}$$
(8.12)

A high degree of coherence $(\mu \to 1)$ implies an ability to form a high contrast interference (fringe) pattern. A low degree of coherence $(\mu \to 0)$ implies an absence of interference, except with great care. In general radiation is partially coherent.



Longitudinal (temporal) coherence length

$$\ell_{\rm coh} = \frac{\lambda^2}{2 \Delta \lambda}$$
 (8.3)

Full spatial (transverse) coherence

$$d \cdot \theta = \lambda/2\pi \tag{8.5}$$

Ch08_Eq1_12_F2.ai

CheironSchool_Sept2011_Lec2.ppt

Spatially filtered undulator radiation Undulator radiation λ_u = 8 cm N = 55 1.9 GeV Tuning 1.00 0.50 200 Photon energy (eV) $(\lambda/2\pi)^2$ Using a pinhole-aperture spatial filter, $(d_x\theta_x)(d_y\theta_y)$ passing only radiation that satisfies $d \cdot \theta = \lambda/2\pi$ Coherent power (mW) 15 $\ell_{\rm coh}$ = N λ /2 $\bar{P}_{\mathrm{coh},N} = \left(\frac{\lambda/2\pi}{d_x\theta_x}\right) \left(\frac{\lambda/2\pi}{d_y\theta_y}\right) \bar{P}_{\mathrm{cen}}$ $\bar{P}_{\mathrm{coh},N} = \frac{e\lambda_u IN}{8\pi\,\epsilon_0 d_x d_y} \left(1 - \frac{\hbar\omega}{\hbar\omega_0}\right) \, f(\hbar\omega/\hbar\omega_0) \quad (8.9)$ for $d_x = 2\sigma_x$, $d_y = 2\sigma_y$, $\theta_{Tx} \rightarrow \theta_x$, $\theta_{Ty} \rightarrow \theta_y$, and $\sigma'^2 \ll \theta_{cen}^2$. Photon energy (eV) CheironSchool_Sept2011_Lec2.ppt

Spatial and spectral filtering of undulator radiation



In addition to the pinhole – angular aperture for spatial filtering and spatial coherence, add a monochromator for narrowed bandwidth and increased temporal coherence:

$$\bar{P}_{\text{coh},\lambda/\Delta\lambda} = \underbrace{\eta}_{\substack{\text{beamline} \\ \text{efficiency}}} \underbrace{\frac{(\lambda/2\pi)^2}{(d_x\theta_x)(d_y,\theta_y)}}_{\substack{\text{spatial} \\ \text{filtering}}} \cdot \underbrace{N\frac{\Delta\lambda}{\lambda}}_{\substack{\text{spectral} \\ \text{filtering}}} \cdot \bar{P}_{\text{cen}}$$
(8.10a)

which for $\sigma_{x,y}^{\prime 2} << \theta_{\text{cen}}^2$ (the undulator condition) gives the spatially and temporally coherent power $(d \cdot \theta = \lambda/2\pi \; ; \; l_{\text{coh}} = \frac{\lambda^2}{2 \; \Delta \lambda})$

$$\bar{P}_{\text{coh},\lambda/\Delta\lambda} = \frac{e\lambda_u I \eta(\Delta\lambda/\lambda) N^2}{8\pi \epsilon_0 d_x d_y} \cdot \left(1 - \frac{\hbar\omega}{\hbar\omega_0}\right) f(\hbar\omega/\hbar\omega_0)$$
(8.10c)

which we note scales as N^2 .


Ch08_SpatialSpectral.ai


Ch08 F11 Mar08.a


CheironSchool_Sept2011_Lec2.ppt


CheironSchool_Sept2011_Lec2.ppt


Spatially and spectrally filtered undulator radiation • Pinhole filtering for full spatial coherence • Monochromator for spectral filtering to $\lambda/\Delta\lambda > N$ EUV/soft x-ray photoemission Water-cooled retract-EUV Varied able Мз interferometer plane retractable mirror plane spherical mirror plane grating (1111111) Entrance pinhole M4 M6 bendable plane bendable 8.0 cm period, N = 55 1.9 GeV, 400 mA 300 $\ell_{\text{coh}} = 10^3 \lambda / 2$ $\eta = 10\%$ 200 $\left(\sigma'^2 \ll \theta_{\rm cen}^2\right)$ (8.10c) Photon Energy (eV)

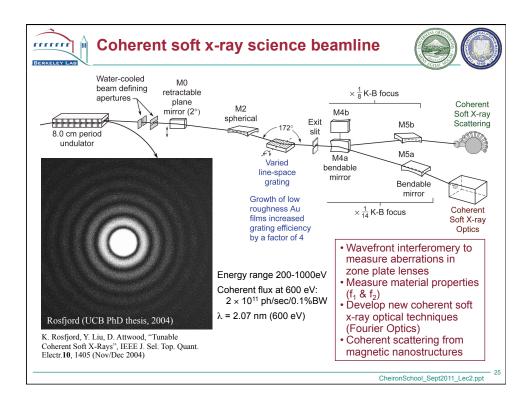


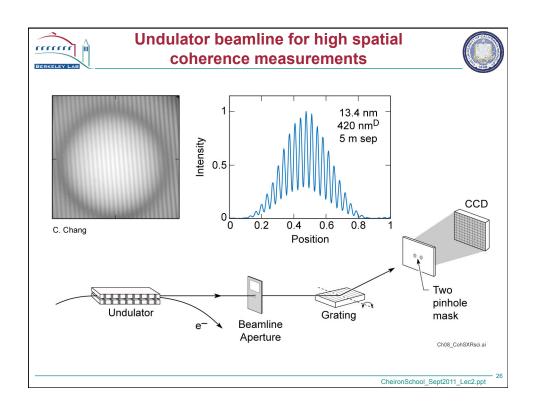


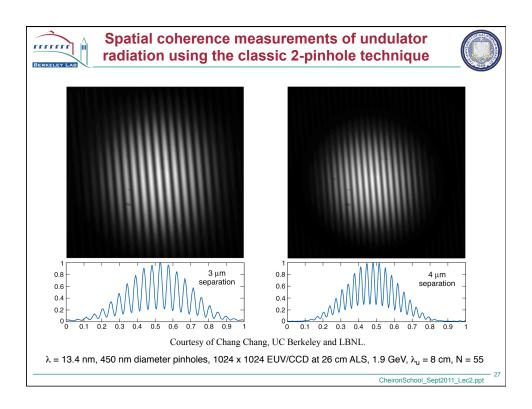


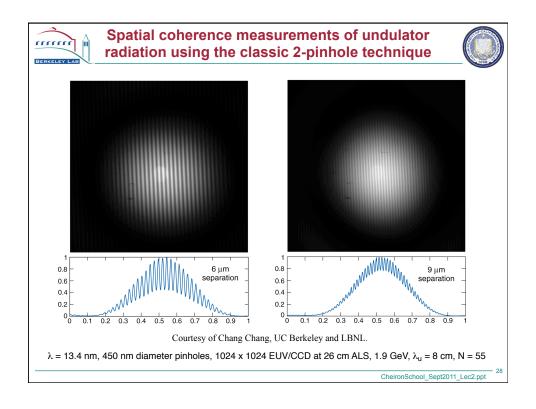


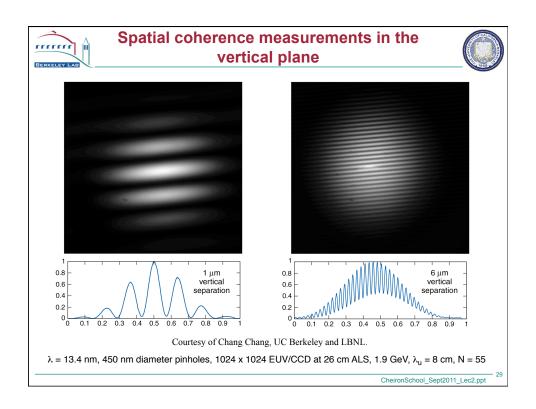


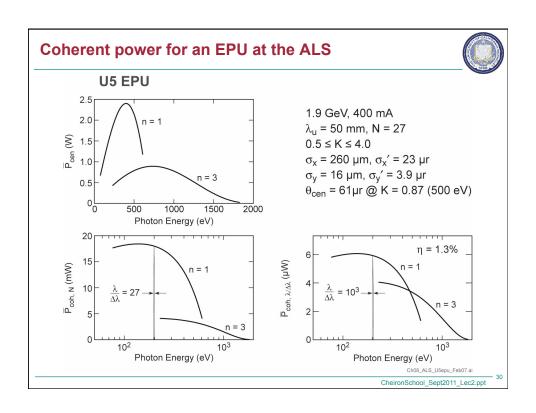


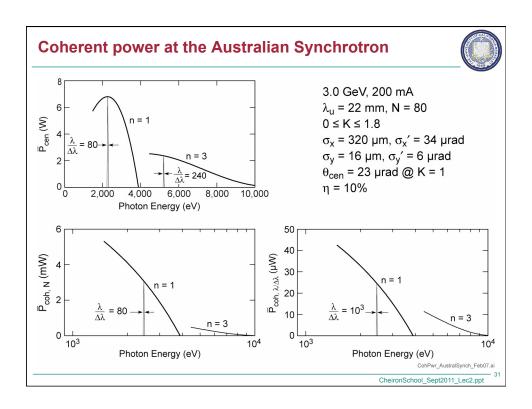


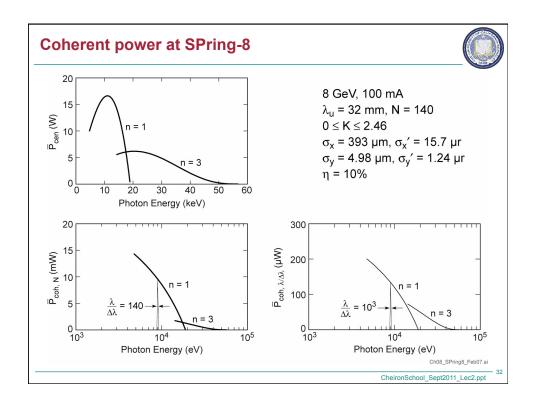


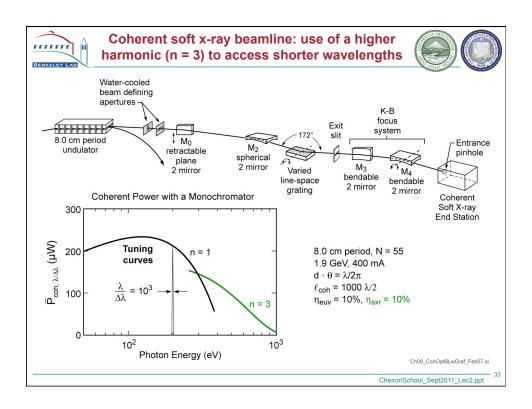


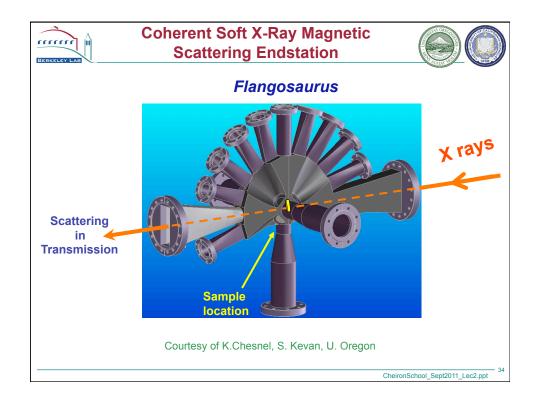

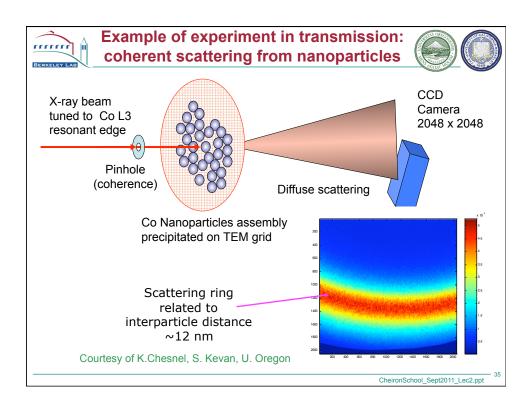

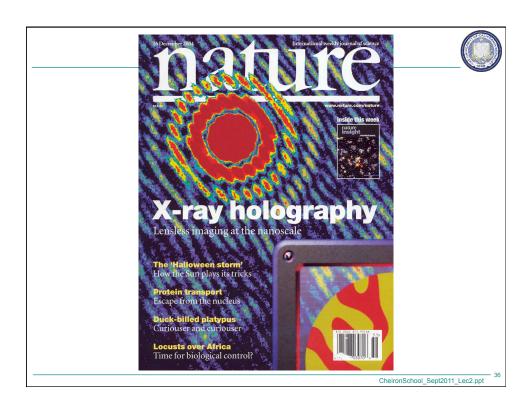

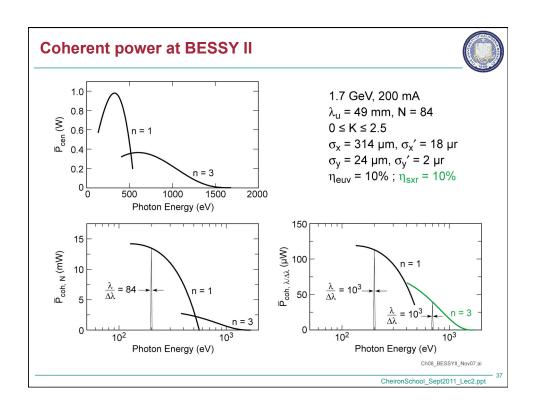

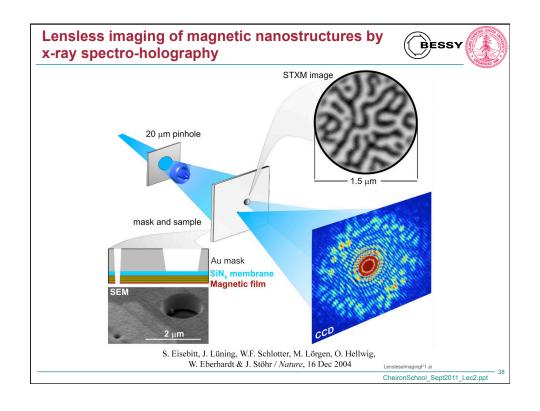


Undulators, FELs and coherence





- Spatial coherence
- Temporal coherence
- Partial coherence
- Full coherence
- Spatial filtering
- Uncorrelated emitters
- Correlated emitters
- True phase coherence and mode control
- Lasers, amplified spontaneous emission (ASE) and mode control
- Undulator radiation
- SASE FEL 100+ fsec soft/hard x-rays
- Seeded FEL true phase coherent x-rays
- High harmonic generation (HHG) compact fsec/asec EUV
- EUV lasers and laser seeded HHG
- Applications with uncorrelated emitters
- Applications with correlated emitters


UndulatorsFELsCoh.a


ironSchool Sept2011 Lec2.ppt

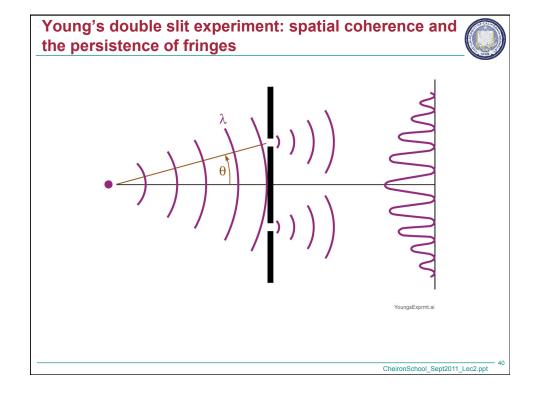


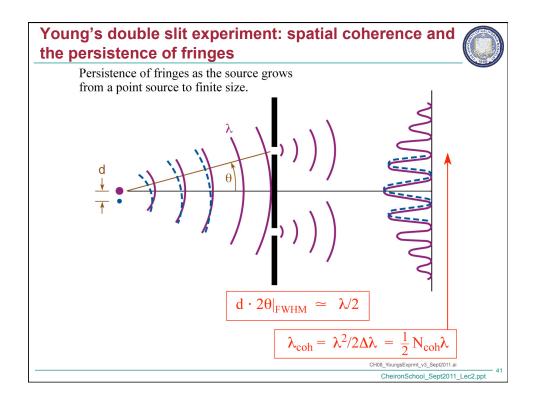


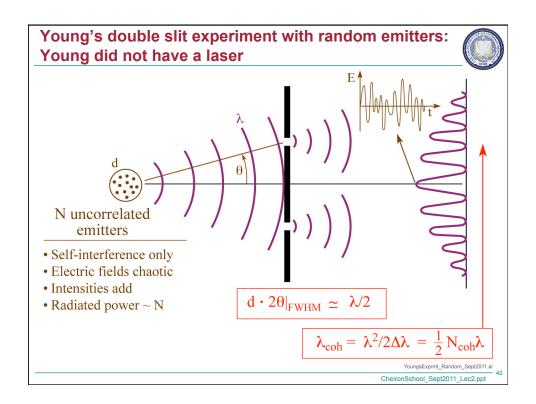


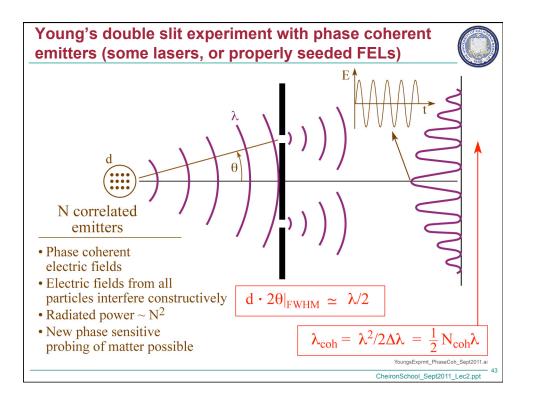


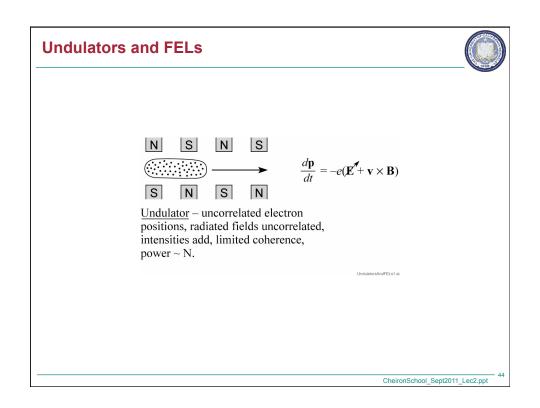


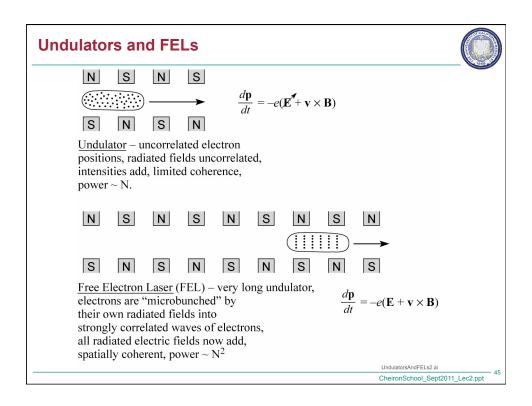

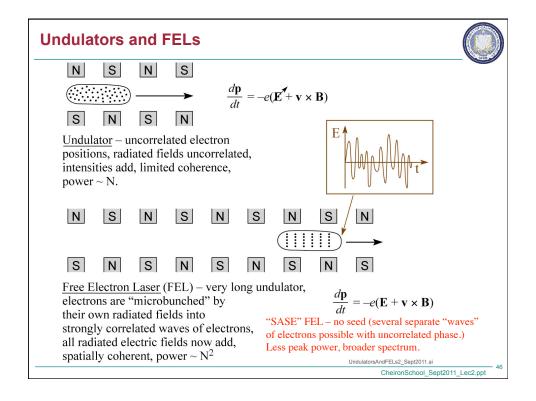

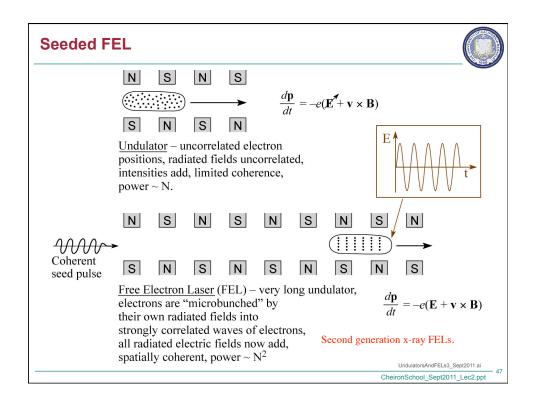

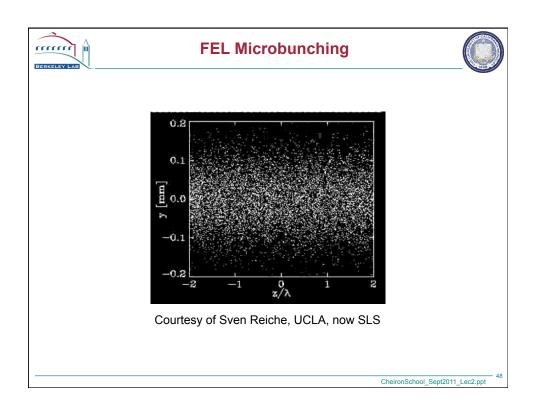

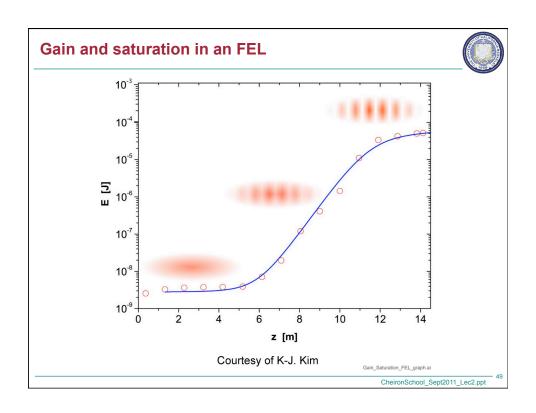

ree electron lasers								
Parameters	Flash FEL (Hamburg)	Fermi (Trieste)	LCLS (Stanford, 2010)	SACLA (Harima, 2011)	EU XFEL (Hamburg, 2015)			
Ee	230	1.2 GeV	13.6 GeV	8 GeV	17.5 GeV			
γ	450/2000	2300	26,600	15,700	35,000			
$\lambda_{\mathbf{u}}$	27.3 mm	65 mm	30 mm	18 mm	35.6 mm			
N	500	216	3700	277	4000			
Lu	30 m	14 m	112 m	81 m	200 m			
ħω	50-200 eV	30-120 eV	1-10 keV	15 keV	4-12 keV			
$\lambda/\Delta\lambda$	100	1000	350	200	1000			
Δτ	30 fsec	100 fsec	160 fsec	100 fsec	100 fsec			
$\dot{\bar{\mathcal{J}}}$ (ph/pulse)	3×10^{12}	10^{14}	1012	7×10^{11}	10 ¹⁴			
rep rate	1 Hz	10 Hz	120 Hz	60 Hz	27 kHz			
î	1.3 kA	500 A	3.4 kA	3 kA	5 kA			
Ŷ	0.3 GW	1 GW	8 GW	4 GW	20-100 GW			
L	260 m	200 m	5 km	710 m	3.4 km			
Polarization	linear	variable	linear	linear	variable			
Mode	SASE	Seeded (3ω Ti: saphire)	SASE	SASE	SASE			

References



- 1) D. Attwood, *Soft X-Rays and Extreme Ultraviolet Radiation* (Cambridge, UK, 2000); available at Amazon.com.
- 2) J. Samson and D. Ederer, *Vacuum Ultraviolet Spectroscopy I and II* (Academic Press, San Diego, 1998). Paperback available.
- 3) J. Als-Nielsen and D. McMorrow, *Elements of Modern X-ray Physics* (Wiley, New York, 2001), 2nd edition (paperback).
- 4) A. Hofmann, Synchrotron Radiation (Cambridge, UK, 2004).

Ch05_ReferencesSept2010.ai

CheironSchool_Sept2011_Lec2.ppt

51

